


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'	~	LJC 12/08/06'
B	整理图纸	YCH 07/27/11'	~	

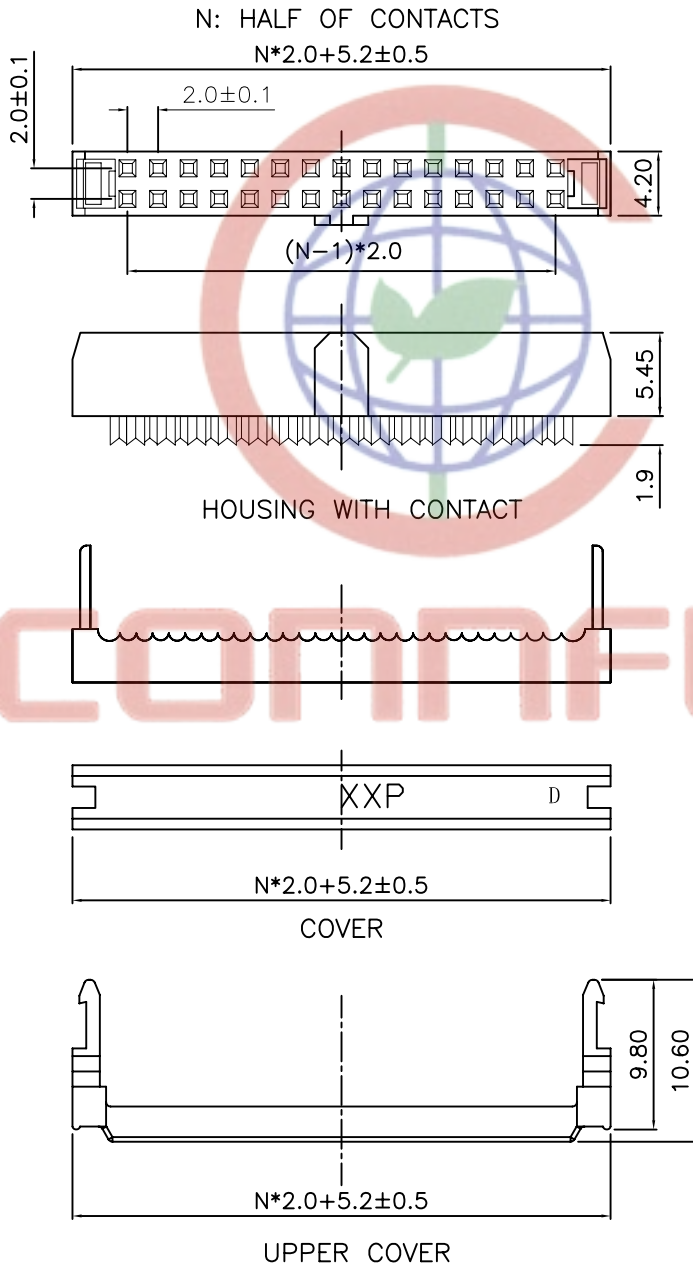

NOTES:

1. MATERIAL

- 1.1 INSULATOR: THERMOPLASTIC (UL 94V-0).
- 1.2 CONTACT: COPPER ALLOY.

2. SPECIFICATION

- 2.1 TEMPERATURE RANGE: -40~+105°C.
- 2.2 CONTACT RESISTANCE: 20mΩ max.
- 2.3 INSULATION RESISTANCE: 1000MΩ min.
- 2.4 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.

3. PART NUMBER: DS1017

- DS1017- X X X X X
- HOUSING COLOR
    - G: GRAY
    - B: BLACK
    - L: BLUE
  - CONTACT PLATING
    - 8: FULL GOLD FLASH
    - 6: FULL TIN
    - 2: NICKEL+GOLD FLASH
  - POLARIZATION
    - A: W/O
    - B: W/O
  - STRAIN RELIEF
    - M: W/O
    - N: W/O
  - No. OF CONTACTS
    - 10 12 16 20 22 24 26
    - 34 36 40 44 50 56 68

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	IDC SOCKET PITCH 2.0mm
X.	±0.60	X.	±5°			WITH 1.0mm FLAT CABLE
.X	±0.38	.X	±3°	mm		
.XX	±0.25	.XX	±2°	A4	SERIES	DS1017 SERIES
DRAWING TYPE	CUSTOMER	晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO., LTD</b>				
SCALE	1:1 SHEET 1 OF 1					
DRAWING NO.	C-DS1017-XXXXX					