

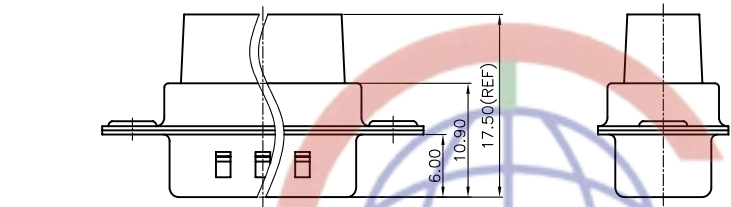



Male



Male terminal

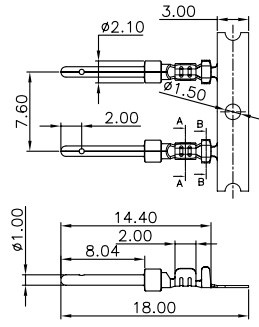

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE:500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE:1000MΩ Min.
- MECHANICAL CHARACTERISTICS:
 - DURABILITY: 300 CYCLES.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE:0°C~+85°C.
 - STORAGE TEMPERATURE:-20°C~+70°C.
- APPLICATION WIRE AWG:#20-24.
- PRODUCT NUMBER CODE:

DS1036-01 - XX X X X X X

CONTACT TYPE
C:CRIMP TYPE

SHELL PLATING
T:FORNT&BACK SHELL TIN
N:FORNT SHELL NICKEL,
BACK SHELL TIN

CONTACT PLATING
0:SELECTIVE GOLD FLASH
8:FULL GOLD FIASH


HOUSING COLOR
U:BLUE
B:BLACK

CONNECTOR TYPE
M:MALE
F:FEMALE






No.OF CONTACTS
09:9pos
15:15pos
25:25pos
37:37pos

| Position | A±0.2 | | B±0.2 | | C±0.2 | |
|----------|-------|--------|-------|--------|-------|--------|
| | Male | Female | Male | Female | Male | Female |
| 9P | 30.80 | 24.99 | 17.90 | 16.33 | | |
| 15P | 39.14 | 33.32 | 26.50 | 24.66 | | |
| 25P | 53.04 | 47.04 | 40.00 | 38.38 | | |
| 37P | 69.32 | 63.50 | 56.50 | 54.84 | | |

Female

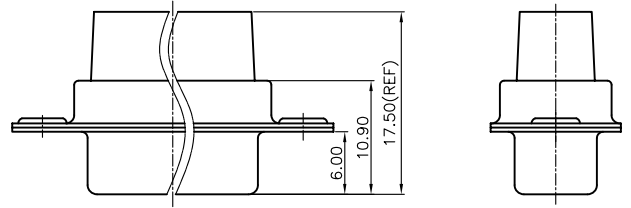

Female terminal

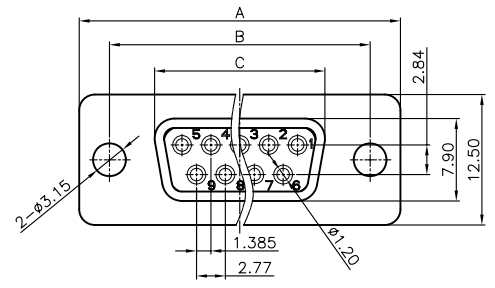

| GENERAL TOLERANCE | ANGLE TOLERANCE |
|-------------------|-----------------|
| X. ±0.60 | X. ±3° |
| .X ±0.38 | .X ±2° |
| .XX ±0.25 | .XX ±1° |

| PROJECTION | TITLE |
|---------------|-------------------------|
| UNITS mm | D-SUB CRIMP TYPE |
| SHEET SIZE A4 | SERIES DS1036-01 SERIES |

| DRAWING TYPE | CUSTOMER |
|---------------------------------|--------------|
| SCALE 1:1 | SHEET 1 OF 1 |
| DRAWING NO. C-DS1036-01-XXXXXXX | |


晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel: 86-574-6508727
Fax: 86-574-6508727

<http://www.connfly.com.cn>
 Add.: West...
 P.O. Box 1321