

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/27/05'	~	LJC 09/27/05'
B	增加螺丝类型 D	L L 06/06/06'	~	LJC 06/06/06'
C	增加螺丝料号	YCH 03/01/07'	~	LJC 03/01/07'

NOTES:

- PRODUCTS PERFORMANCE:
  - VOLTAGE RATING: 250V AC.
  - CONTACT CURRENT RATING: 1.5A MAX. PER PIN.
  - CONTACT RESISTANCE: 20mΩ MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ MIN.
  - OPERATING TEMPERATURE: -20°C~+70°C.

2. PRODUCT NUMBER CODE:

DS1038 - X X X X X X X X

SCREW DIM. G Ⓞ

4: 4.80mm

5: 5.80mm

BOARD LOCK DIM. F

4: 4.00mm

7: 3.70mm

SCREW TYPE

A: WITH SCREW TYPE

B: WITH RIVET TYPE

C: RIVET TYPE WITH FIXED SCREWS

D: RIVET TYPE WITH SCREWS IN BULK PACKAGE

CONTACT PLATING

Si: SELECTIVE GOLD FLASH

8: FULL GOLD FLASH

SHELL PLATING

N: Nickel

T: Tin

COLOR OF HOUSING

B: BLACK

U: BLUE

C: BLUE(PC99)

CONNECTOR TYPE

M: MALE

F: FEMALE







No. OF CONTACT

15: 15pos.

44: 44pos.

26: 26pos.

62: 62pos.

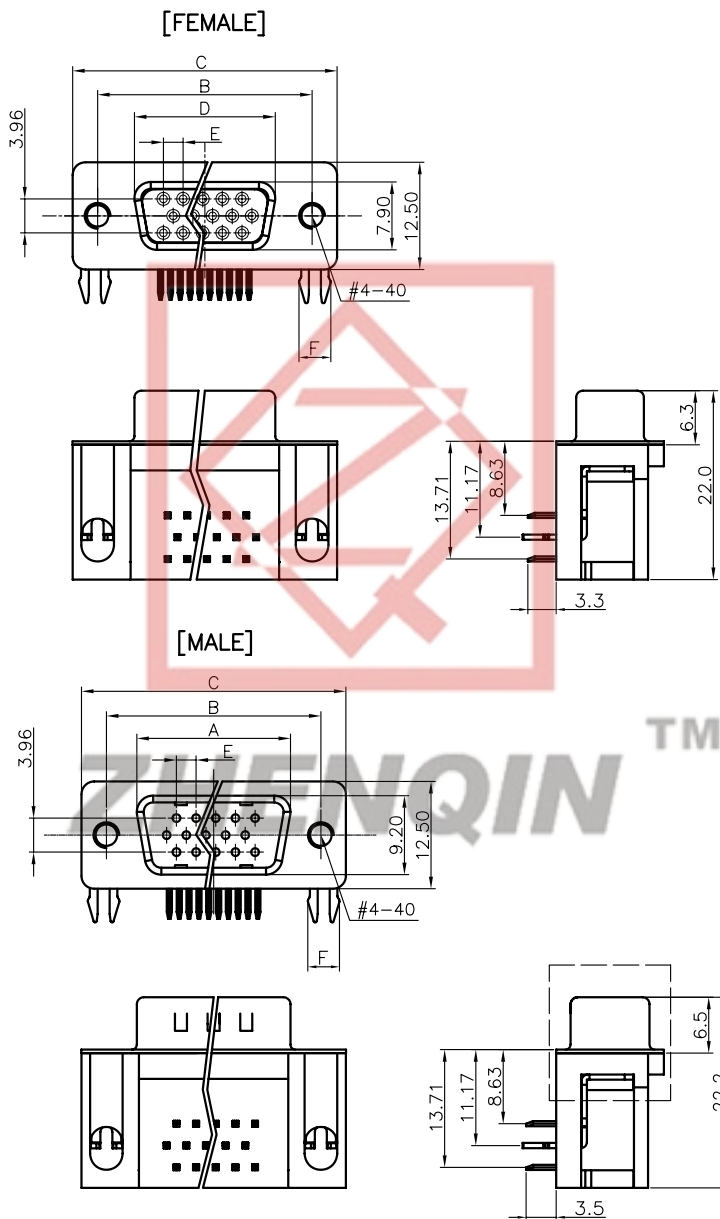

RECOMMEND PCB LAYOUT(TOLERANCE ±0.05)  
(VIEW FROM TOP SIDE)

Dimension

Position	A±0.2	B±0.2	C±0.3	D	E
15	17.90	24.99	30.84	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.14

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	mm	D-SUB H.D RIGHT ANGLE TYPE
.X ±0.38	.X ±3°		
.XX ±0.25	.XX ±2°		
DRAWING TYPE	CUSTOMER	SHEET SIZE	SERIES
SCALE	1:1	A4	DS1038 SERIES
DRAWING NO.	C-DS1038-XXXXXXX	宁波正青电子有限公司 NINGBO ZHENQIN ELECTRONIC CO. LTD	

Tel: 86-574-63510817

Fax: 86-574-63510817

Http://www.zhenqin.com.cn  
E-mail: zhenqin@zhenqin.com.cn