

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 06/10/05'		





NOTES:

- SPECIFICATIONS:
  - VOLTAGE RATING: 30V DC.
  - CONTACT CURRENT RATING: 1A MAX. PER PIN.
  - CONTACT RESISTANCE: 30 MILLIOHMS MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
  - OPERATING TEMPERATURE: -20°C~+80°C.

2. PRODUCT NUMBER CODE:

DS1093-01 - X X X X

Contact plating  
 03: Selective Gold Flash  
 30: Selective 30u" Gold  
  
 No. of contacts:  
 4 5 6 7 8  
  
 Shell Plating:  
 N: Nickel  
 6: Tin  
  
 Color of housing  
 B: Black  
 G: Green  
 P: Purple  
  
 Series No.  
 DS1093-01

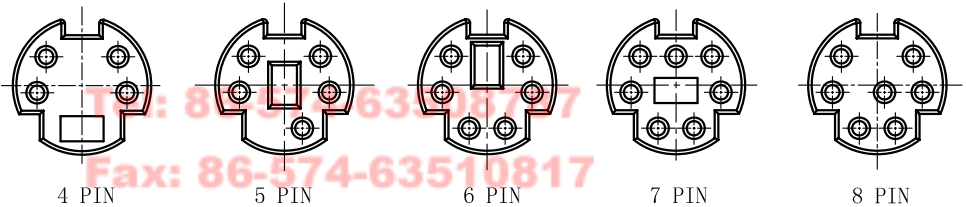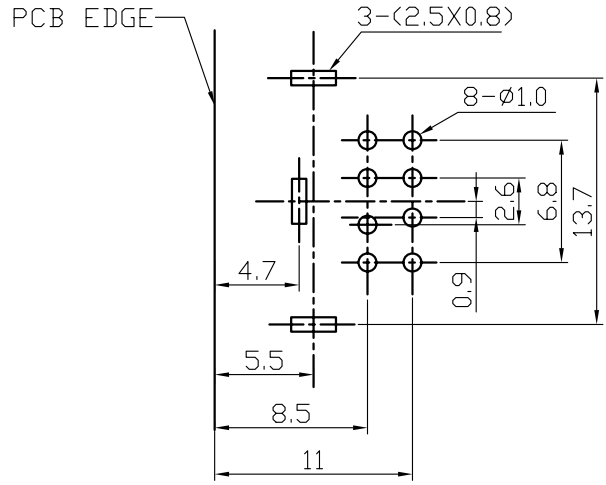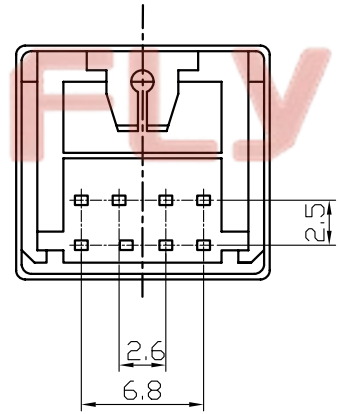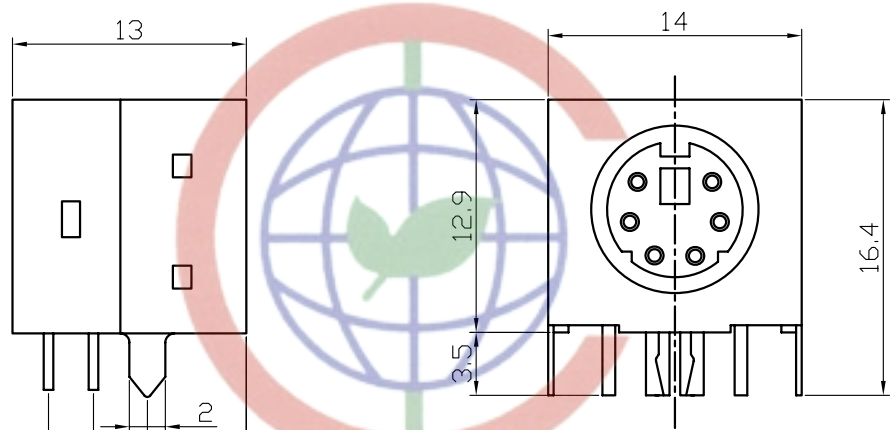

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	UNITS	MINI DIN 803 TYPE
.X ±0.38	.X ±3°	SHEET SIZE	SERIES DS1093-01 SERIES
.XX ±0.25	.XX ±2°		
DRAWING TYPE	CUSTOMER	晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>	
SCALE	1:1 SHEET 1 OF 1		
DRAWING NO.	C-DS1093-01-XXXXX		