




# 慈溪市科发电子有限公司

CIXI KEFA ELECTRONICS CO., LTD.



KF2EDGK-3.5/3.81mm

3.50 (3.81) ± 0.05



3.50 (3.81) x P ± 0.20


7.20 ± 0.10



11.20 ± 0.15

<b>Dimensions</b>	
Pitch:	3.5mm, 3.81mm
Pole:	2P-24P
<b>Material</b>	
Housing:	PA66, UL94V-2
Screw:	M2.0, Brass, Tin plated
Contact:	Phos. Bronze Ni plated
Wire guard:	Brass, Ni plated
<b>Electrical</b>	
Rated voltage:	300V
Rated current:	8A
Contact resistance:	20mΩ
Insulation resistance:	5000MΩ / 1000V
With standing voltage:	AC1500V/Min
Wire range:	24-12AWG
<b>Mechanical</b>	
Temp. Range:	-40° C / +105° C
MAX Soldering:	250° C
Strip length:	6-7mm
Torque:	0.20Nm

## HOW TO ORDER:

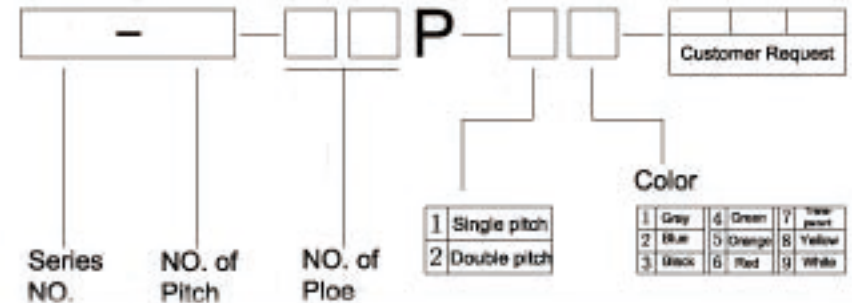

←→	慈溪市科发电子有限公司 CIXI KEFA ELECTRONICS CO., LTD.
	NAME KF2EDGK-3.5/3.81mm