




慈溪市科发电子有限公司

CIXI KEFA ELECTRONICS CO., LTD.

产品规格书

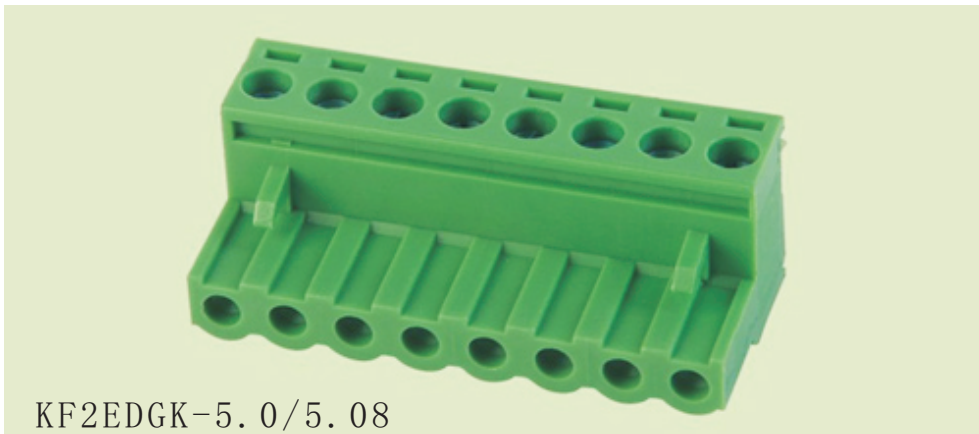

KF2EDGK-5.0/5.08

Electrical

Rated voltage

300V

Rated current

10A

Wire range

28-12 AWG

Withstanding voltage

AC2500V/1Min

Mechanical

Torque

0.4Nm (3.5Lb.in)

Strip length

-40°C—+105°C

7.0-8.0mm

Dimension

Pitch

5.0/5.08mm

Poles

2P-24P

MATERIAL

Housing

PA66 UL94V-0

Wire cage



Brass, Ni plated or steel Zinc plated

Contact


Phosphor, Ni plated

Screw

M2.0 Steel Zincplated

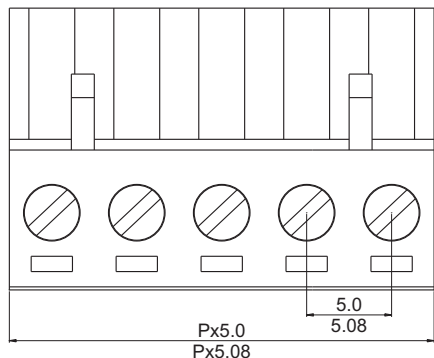

订购方式:

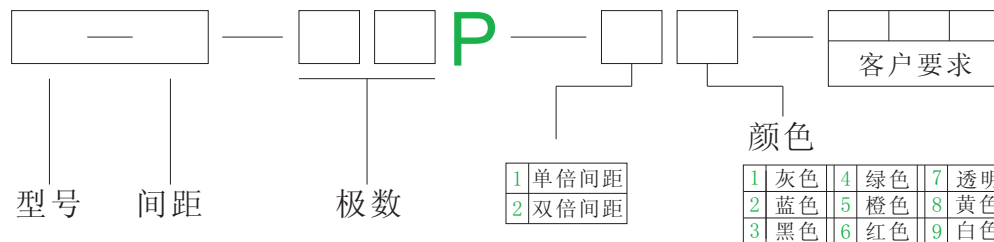

慈溪市科发电子有限公司
CIXI KEFA ELECTRONICS CO., LTD.



NAME KF2EDGK-5.0/5.08