






# 慈溪市科发电子有限公司

## CIXI KEFA ELECTRONICS CO., LTD.



产品规格书

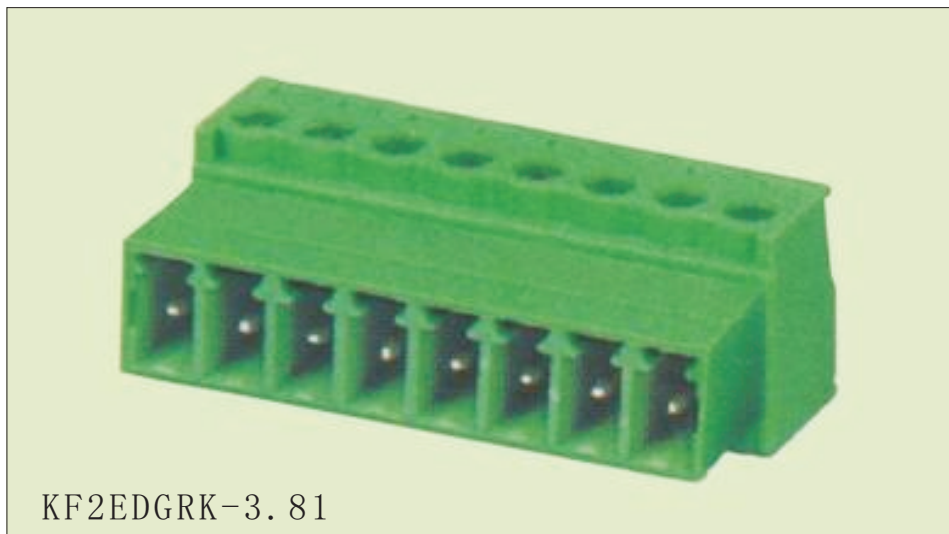

<b>Electrical</b>	
Rated voltage	300V
Rated current	8A
Wire range	28-16 AWG
Withstanding voltage	AC2000V/1Min
<b>Mechanical</b>	
Torque	0.2Nm (1.8Lb.in)
Strip length	-40°C—+105°C 7.0-8.0mm
<b>Dimention</b>	
Pitch	3.5/3.81mm
Poles	2P-24P
<b>MATERIAL</b>	
Housing	PA66 UL94V-0
Wire cage	Brass, Ni plated
Contact	Phosphor, Ni plated
Screw	M2 Steel Zinc plated

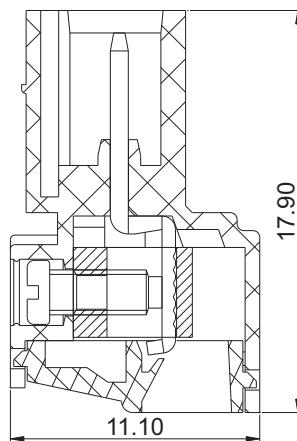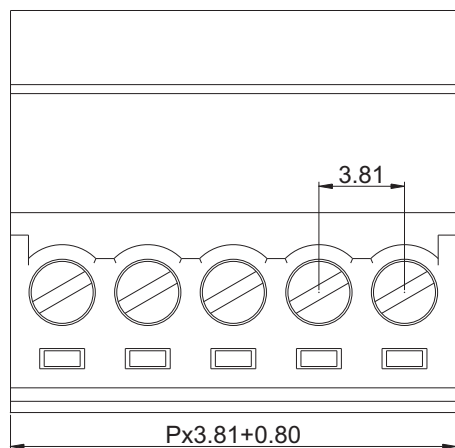

订购方式:

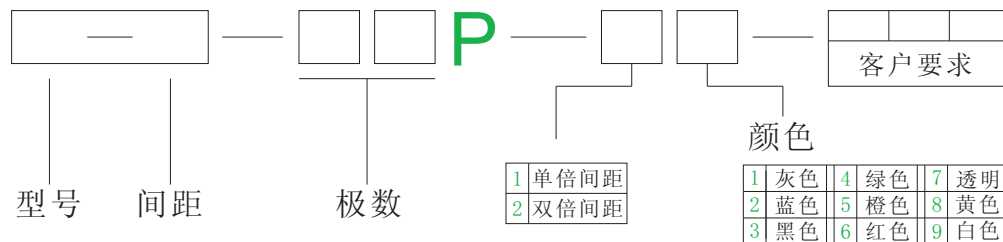

慈溪市科发电子有限公司  
CIXI KEFA ELECTRONICS CO., LTD.



NAME KF2EDGRK-3.81