





慈溪市科发电子有限公司

CIXI KEFA ELECTRONICS CO., LTD.

产品规格书




KF2EDGKB-5.0/5.08

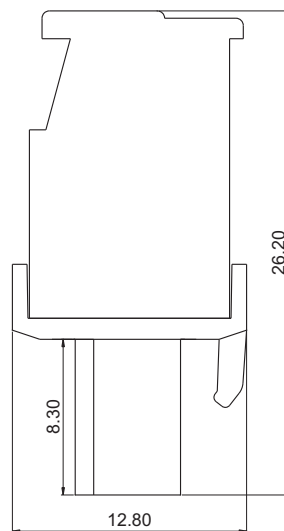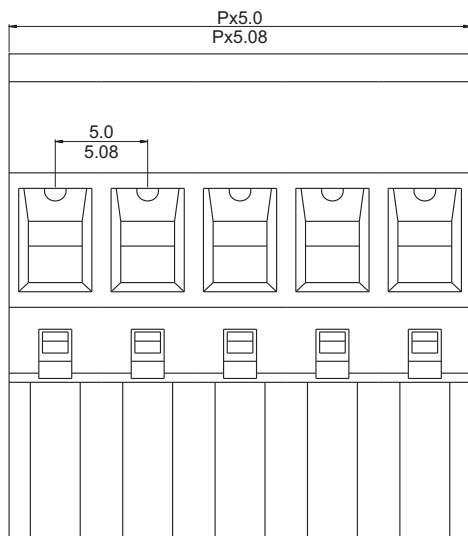

Certification	cRU us	CE
Electrical performance		
Reference standard	UL	IEC
Rated voltage	300V	320V
Rated current	10A	15A
Wire diameter	28-12AWG	2.5mm ²
Rated impulse voltage	2.5kV	
Mechanical properties		
Ambient temperature	-40°C~+105°C	
Strip length	7-8mm	
Maximum locking torque	0.4Nm(3.5lb-In.)	
Size		
Spacing	5.0/5.08mm(.197"/.200")	
The number of poles	2-24P	
Material and Plating		
Plastic parts	PA66, UL94V-0	
Welding needle		
Screw	M2.5,Steel,PlatingCr ₃ +Passivation color zinc	
Square box	Brass,Nickel plating	
Contact material	Phosphor bronze Nickel plating	
Reed		

mm
(INCH)



THIROANGIF PROJECTION



慈溪市科发电子有限公司
CIXI KEFA ELECTRONICS CO., LTD.

NAME KF2EDGKB-5.0/5.08