







# 慈溪市科发电子有限公司

## CIXI KEFA ELECTRONICS CO., LTD.


产品规格书

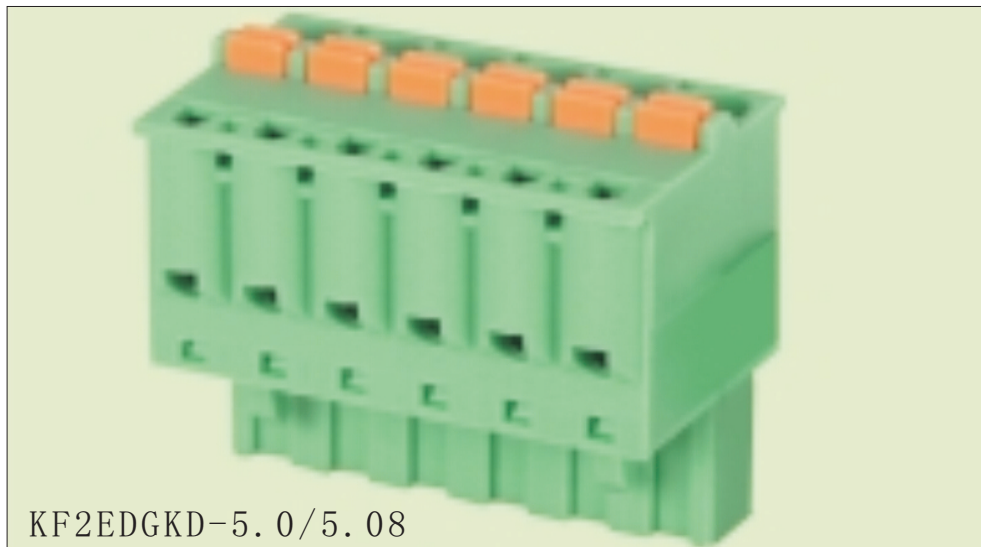

Certification	cULus	CE
<b>Electrical performance</b>		
Reference standard	UL	IEC
Rated voltage	300V	300V
Rated current	10A	15A
Wire diameter	28-12AWG	2.5mm <sup>2</sup>
Rated impulse voltage	2.5KV	
<b>Mechanical properties</b>		
Ambient temperature	-40°C~+105°C	
Strip length	10-11mm	
Maximum locking torque		
<b>Size</b>		
Spacing	5.0/5.08mm(.197"/.200")	
The number of poles	2-24P	
<b>Material and Plating</b>		
Plastic parts	PA66, UL94V-0	
Welding needle		
Screw		
Square box		
Contact material	Phosphor bronze,Nickel plating	
Reed	Stainless steel	

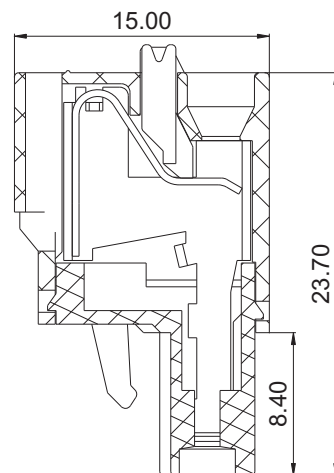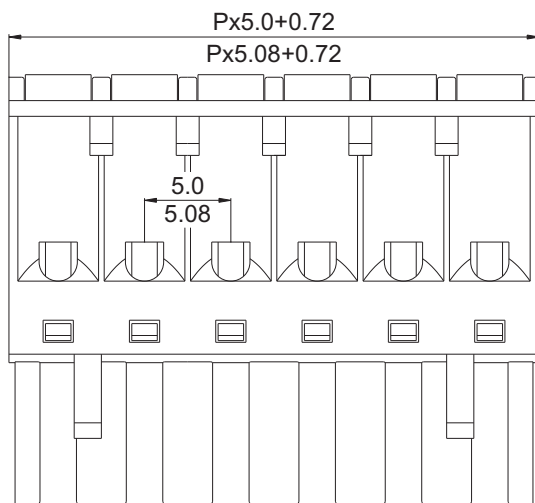

慈溪市科发电子有限公司  
CIXI KEFA ELECTRONICS CO., LTD.



THIROANGIF PROJECTION

**NAME** KF2EDGKD-5.0/5.08