



## QUICK SPLICE CONNECTORS

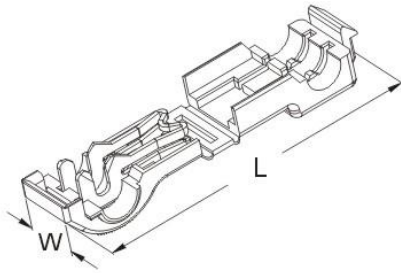

### MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16	14	12
AMP.	9	12	17	18	30	35

**MAXIMUM ELECTRICAL RATING:** 105°C 600 VOLTS







**INSULATION MATERIAL:** NYLON

**INSULATION COLOR:**

22-18A.W.G.: RED ■ 18-14A.W.G.: BLUE ■

12A.W.G.: YELLOW ■

**TERMINAL MATERIAL:** PHOSPHOR BRONZE

FIO BITOLA A.W.G. mm <sup>2</sup>	CÓDIGO CONECTOR	CODIGO TERMINAL MACHO	DIMENSION inch(mm)		COLOR
			W	L	
22-18 A.W.G. 0.5-0.75 mm <sup>2</sup>	 BR878-1.25-250	 MDFNY-1.25-250	0.366 9.3	1.583 40.2	RED
18-14 A.W.G. 0.75-2.5 mm <sup>2</sup>	 BR878-2-250	 MDFNY-2-250	0.366 9.3	1.583 40.2	BLUE
12 A.W.G. 4 mm <sup>2</sup>	 BR878-5.5-250	 MDFNY-5.5-250	0.366 9.3	1.583 40.2	YELLOW